

Genie® AWP™-20S, AWP-25S, AWP-30S, AWP-36S, AWP-40S

Specifications

Models	AWP-20S		AWP-25S		AWP-30S	
Measurements	US	METRIC	US	METRIC	US	METRIC
Working height max. ⁽¹⁾	26ft 1in	8.0m	30ft 11in	9.4m	35ft 6in	10.8m
Platform height	20ft 1in	6.1m	24ft 11in	7.6m	29ft 6in	9.0m
A Height - stowed (standard)	6ft 6in	1.98m	6ft 6in	1.98m	6ft 6in	1.98m
B Height Tilted back ⁽²⁾ (standard)	-	-	-	-	-	-
C Length - stowed (standard)	4ft 1in	1.24m	4ft 3.5in	1.31m	4ft 5in	1.35m
D Length - tilted back ⁽²⁾	-	-	-	-	-	-
E Width	2ft 5in	0.74m	2ft 5in	0.74m	2ft 5in	.74m

Productivity

Lift capacity	350lb	159kg	350lb	159kg	350lb	159kg
F G Outrigger footprint (l/w) (standard)	5ft 1in/4ft 5in	1.55/1.35m	5ft 9in/5ft 1in	1.75/1.55m	6ft 4in/5ft 8in	1.93/1.73m
H Corner access ⁽³⁾ (standard)	1ft 3in	38cm	1ft 7in	48cm	1ft 10in	0.56m
I J Wall access front/side (standard)	6in/1ft 1in	0.15/33cm	7in/1ft 5in	0.18/43cm	8in/1ft 9in	0.20/0.53m
F G Outrigger footprint (l/w) (standard)	8ft 1in/7ft 5in	2.46/2.26m	9ft 9in/9ft 2in	2.97/2.79m	9ft 9in/9ft 2in	2.97/2.79m
H Corner access ⁽³⁾ (standard)	1ft 7in	0.48m	2ft 6in	0.76m	2ft 3in	0.69m
I J Wall access front/side (standard)	1ft 7in/2ft 8in	0.48/0.81m	2ft 5in/3ft 6in	0.74/1.07m	2ft 3in/3ft 6in	0.69/1.07m
Standard platform dimensions (l/w/h)	27/26/44.75in	0.69/0.66/1.14m	27/26/44.75in	0.69/0.66/1.14m	27/26/44.75in	0.69/0.66/1.14m
Gated standard platform dimensions (l/w/h)	27/26/44.75in	0.69/0.66/1.14m	27/26/44.75in	0.69/0.66/1.14m	27/26/44.75in	0.69/0.66/1.14m
Gated narrow platform dimensions (l/w/h)	26/20/44.75in	0.66/0.51/1.14m	26/20/44.75in	0.66/0.51/1.14m	26/20/44.75in	0.66/0.51/1.14m

Weight and Floor Loading⁽⁴⁾

AC models (Standard)	677lb	307kg	727lb	330kg	777lb	352kg
DC models (Standard)	766lb	347kg	817lb	371kg	867lb	393kg
Air motor (Standard)	-	-	-	-	777lb	352kg
Occupied floor pressure	0.35psi	2.40kPa	0.28psi	1.9kPa	0.24psi	1.65kg

Models	AWP-36S		AWP-40S	
Measurements	US	METRIC	US	METRIC
Working height max. ⁽¹⁾	42ft 5in	12.90m	46ft 4in	14.10m
Platform height	36ft 5in	11.10m	40ft 4in	12.30m
A Height - stowed (standard)	9ft 1.5in	2.78m	9ft 1.5in	2.78m
B Height Tilted back ⁽²⁾ (standard)	6ft 3.5in	1.92m	6ft 6in	1.98m
C Length - stowed (standard)	4ft 7in	1.40m	4ft 8in	1.42m
D Length - tilted back ⁽²⁾	9ft 9in	2.97m	9ft 9in	2.97m
E Width	2ft 5in	0.74m	2ft 5in	0.74m

Productivity

Lift capacity	350lb	159kg	300lb	136kg
F G Outrigger footprint (l/w) (standard)	6ft 11in/6ft 3in	2.12/1.91m	7ft 5in/6ft 9in	2.26/2.06m
H Corner access ⁽³⁾ (standard)	2ft 5in	0.74m	2ft 7in	0.79m
I J Wall access front/side (standard)	1ft 2in/2ft 1in	0.36/0.64m	1ft 3in/2ft 4in	0.38/0.71m
F G Outrigger footprint (l/w) (standard)	11ft 7in/10ft 11in	3.53/3.33m	12ft 9in/12ft 1in	3.89/3.68m
H Corner access ⁽³⁾ (standard)	3ft 4in	1.02m	3ft 8in	1.12m
I J Wall access front/side (standard)	3ft 4in/4ft 4in	1.02/1.32m	3ft 8in/5ft	1.12/1.52m
Standard platform dimensions (l/w/h)	27/26/44.75in	0.69/0.66/1.14m	27/26/44.75in	0.69/0.66/1.14m
Gated standard platform dimensions (l/w/h)	27/26/44.75in	0.69/0.66/1.14m	27/26/44.75in	0.69/0.66/1.14m
Gated narrow platform dimensions (l/w/h)	26/20/44.75in	0.66/0.51/1.14m	26/20/44.75in	0.66/0.51/1.14m

Weight and Floor Loading⁽⁴⁾


AC models (Standard)	1,017lb	461kg	1,040lb	472kg
DC models (Standard)	1,107lb	502kg	1,130lb	513kg
Air motor (Standard)	-	-	-	-
Occupied floor pressure	0.23psi	1.60kPa	0.20psi	1.37kg

Power

Power source - AC models	110V/50-60 Hz 220V/50-60 Hz
Power source - DC models	12V DC

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA
Sound Pressure level (platform workstation)	< 70 dBA
Vibrations	< 2.5 m/s ²

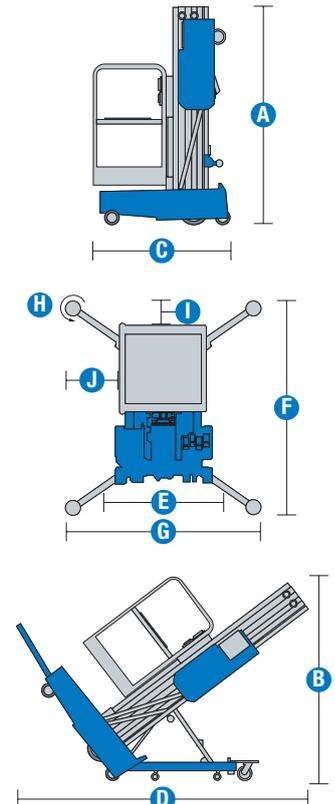

(1) The metric equivalent of working height adds 2m to platform height. U.S. adds 6ft to platform height.

(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(3) Weight refers to standard configuration and may vary depending on options and/or country standards.

(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® AWP™-20S, AWP-25S, AWP-30S, AWP-36S, AWP-40S

SKU: Stock Models

- **AWP20S01CE0001:** AWP-20S, AC Power
- **AWP25S01CE0004:** AWP-25S, AC Power
- **AWP30S01CE0004:** AWP-30S, AC Power
- **AWP30S01CE0005:** AWP-30S, DC Power
- **AWP36S01CE0002:** AWP-36S, AC Power with Tilt-back frame
- **AWP40S01CE0004:** AWP-40S, AC Power with Tilt-back frame

SKU: Stock Models

- **AWP20S01CE0002:** AWP-20S, DC Power
- **AWP25S01CE0003:** AWP-25S, DC Power
- **AWP30S01CE0005:** AWP-30S, DC Power
- **AWP36S01CE0001:** AWP-36S, DC Power with Tilt-back frame
- **AWP40S01CE0005:** AWP-40S, DC Power with Tilt-back frame

* Build to Order

Option availability		S	S+	BtO
Power	Wet battery (DC)	✓	✓	✓
	Dry battery (DC)			○
	Air motor (AWP-30s only)			○
	110V/50Hz		○	○
	220V/50Hz	✓	✓	✓
	12V 110/230V 50-60Hz worldwide smart charging system	✓	✓	✓
Platform	Sliding mid-rail standard platform	✓	✓	✓
	Gated standard platform			○
	Gated narrow platform			○
	Descent light and alarm package		○	○
	Tool tray		○	○
	AC power to platform	✓	✓	✓
Chassis	Standard base for all models	✓	✓	✓
	Auxiliary platform lowering	✓	✓	✓
	Easy operation: rolls through standard doorways	✓	✓	✓
	Fast load into pickup trucks	✓	✓	✓
	Forklift pockets (Standard base only)	✓	✓	✓
	Ground fault interrupt	✓	✓	✓
	Heavy-duty design and mast	✓	✓	✓
	LED lights confirm proper set-up	✓	✓	✓
	Outrigger storage pockets	✓	✓	✓
	Rocker base system for maneuverability	✓	✓	✓
	Standard outriggers	✓	✓	✓
	Tie-down attachment points	✓	✓	✓

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options




Lightweight



Easy to Load and Transport



Low Floor Loading

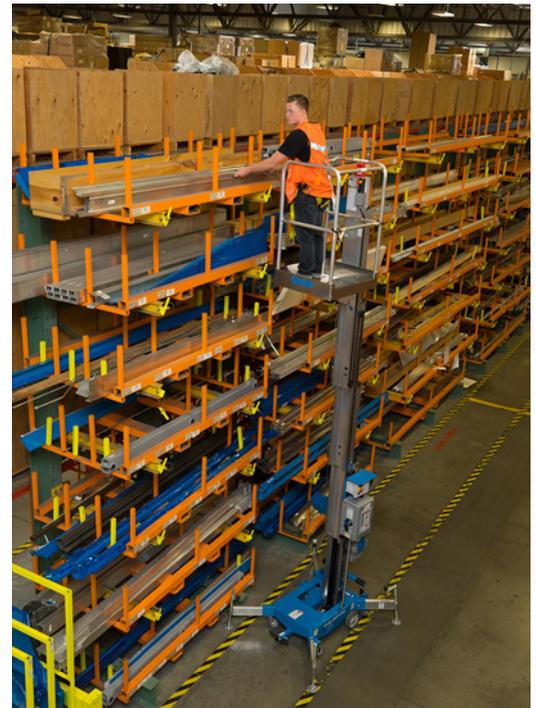

Genie Genuine Accessories⁽¹⁾

- Platform-locating laser light
- Fluorescent tube caddy

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.