

# Mecalac

Compaction  
Rollers



# Mecalac



# TOUGH EXTERIOR, INTERNAL INNOVATION

With more than 60 years' experience in both design and production, we continue to innovate, boasting a comprehensive portfolio of state-of-the-art equipment specifically developed to revolutionise operations for construction professionals worldwide – saving time, money and labour.

Built with innovation in mind, Mecalac compaction rollers are designed to withstand the most demanding tasks. Easy to use controls, intuitive layout and with vibration reduction technology enhances operator comfort and productivity.


Ranging from the versatile MBR71 pedestrian roller to the productive TV1400 tandem roller (and everything in-between), there's the right machine for every application.

HIGH PERFORMANCE, FUEL EFFICIENT KUBOTA 32.8HP (24.5KW) ENGINE, REXROTH HYDROSTATIC TRANSMISSION

WRAP AROUND STEERING COLUMN FOR IMPROVED OPERATOR COMFORT

HEAVY DUTY FRONT TILTING ENGINE CANOPY PROVIDES EXCELLENT SERVICE ACCESS

EASILY SELECTABLE 1 OR 2 DRUM VIBRATION, INCLUDING DUAL FREQUENCY VIBRATION

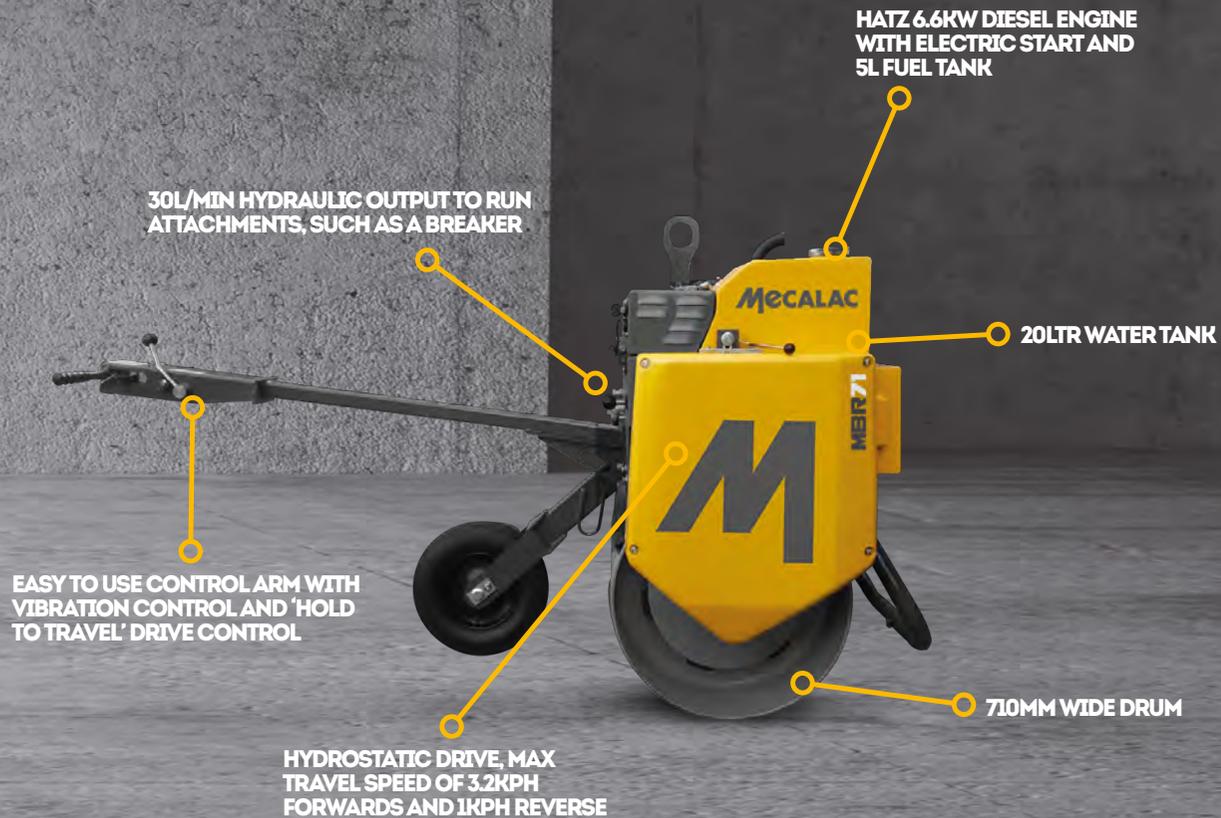



# SINGLE DRUM ROLLERS

## MBR71

Designed for the compaction of asphalt materials, Mecalac pedestrian rollers provide class-leading performance in applications including highway repair, footpaths, cycle lanes, playgrounds and landscaping environments.

The proven design provides superb balance, making it easy to manoeuvre in tight spaces.

Innovative rubber couplings in the drum reduce vibration transfer for low hand-arm (HAV) levels for additional comfort. The MBR-71 is fitted with a 'hold to travel' handle so that the hydraulic drive cuts off if the control lever is released.

For added versatility the MBR71 features an all-new tow-behind trailer and hydraulic breaker combination. Inverted suspension ensures the trailer is perfect for low loading, while a new light board design ensures optimum visibility and compliance for road-tow operation.

## FEATURES – SINGLE DRUM ROLLERS

- Reliable, air-cooled engine with electrical start for easy start-up
- Effective drum clearing from front and rear scraper bars
- High capacity corrosion free water system ensures drum cleanliness at all times
- Hydrostatic transmission for easy manoeuvrability
- High quality surface finish on drum for improved results on asphalt surfaces





# TANDEM VIBRATING ROLLERS

Arguably some of the toughest in the world, the Mecalac range of tandem rollers are designed for the rigorous demands of the plant hire industry.

## TV800


The TV800 (featuring with an 800mm drum) is perfect for small sites. An optional hydraulic breaker outlet provides 30L/min flow rate (Category 2), further increasing versatility.

## TV900

With a 900mm drum, high compaction productivity is achieved by the TV900's mass exciter system, which delivers high dynamic force, optimised balance between frequency and amplitude provides ultimate versatility in meeting all kinds of job site conditions. An optional hydraulic breaker outlet provides 30L/min flow rate (Category 2).

## TV1000

Setting the standard for asphalt and granular layers compaction, the TV1000 is operator friendly and highly productive. Hydrostatic power management provides excellent hill-climbing ability and, when combined with superb articulation delivering a tight turning circle, are highly manoeuvrable. The TV1000 features 1000mm wide drums.

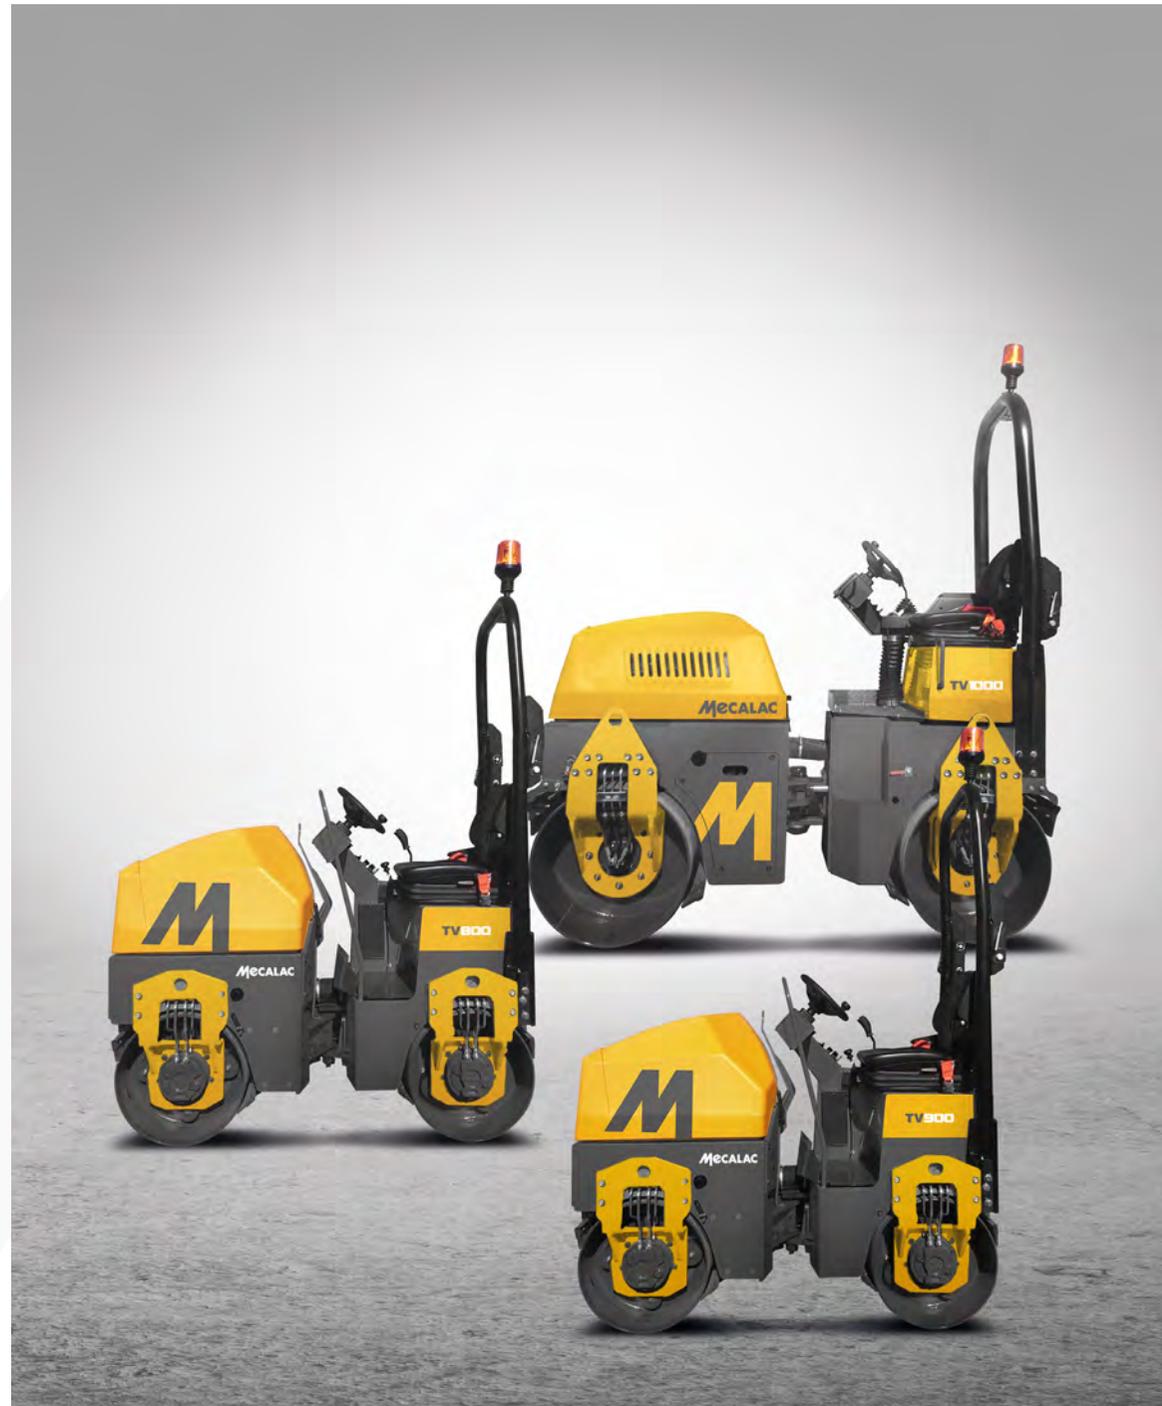



# TANDEM VIBRATING ROLLERS

## TV1200

Bringing new life to a proven classic, the TV1200 features an all-new vacuum formed bonnet, revised side arm, LED lights and a fully-refreshed livery. A water-cooled diesel engine and renowned mass exciter system completes the set-up, guaranteeing a reliable roller with outstanding performance.

## TV1300 AND TV1400

With 1300mm and 1400mm wide drums, outstanding productivity is achieved via the powerful, well proven mass exciter system. Optimised balance between frequency and amplitude provides ultimate versatility in meeting all kinds of job site conditions.

## FEATURES – TANDEM VIBRATING ROLLERS

- Rugged design to withstand plant hire industry conditions
- Water-cooled diesel engines provide excellent reliability, low noise and low emissions
- High-static linear loads reduce the number of passes
- Two frequencies provide enhanced versatility
- Optional pressure fed water sprinkler provides greater flow regulation for improved cleaning capability






# TECHNICAL SPECIFICATIONS



<b>Compaction Roller Range</b>	MBR-71	TV800	TV900	TV1000	TV1200	TV1300	TV1400
<b>Operating Weight kg</b>	513	1559	1568	2570	2925	3435	4390
<b>Static Linear Load kg/cm</b>	7.2	9.7	8.7	12.85	12.18	13.21	15.68
<b>Frequency VPM</b>	3900	2760 / 3120	2760 / 3120	2880 / 3360	2880 / 3360	2880 / 3360	2880 / 3360

# → TECHNICAL DATA PEDESTRIAN ROLLER

DIMENSIONS IN MM		MBR71
<b>A</b>	Overall Height	1300
<b>B</b>	Curb Clearance - Farside	215
<b>C</b>	Overhang - Farside	110
<b>D</b>	Drum Width	710
<b>E</b>	Overhang - Curbside	410
<b>F</b>	Curb Clearance - Curbside	2180
<b>G</b>	Drum Diameter	575
Drum Shell Thickness (not shown)		8.0

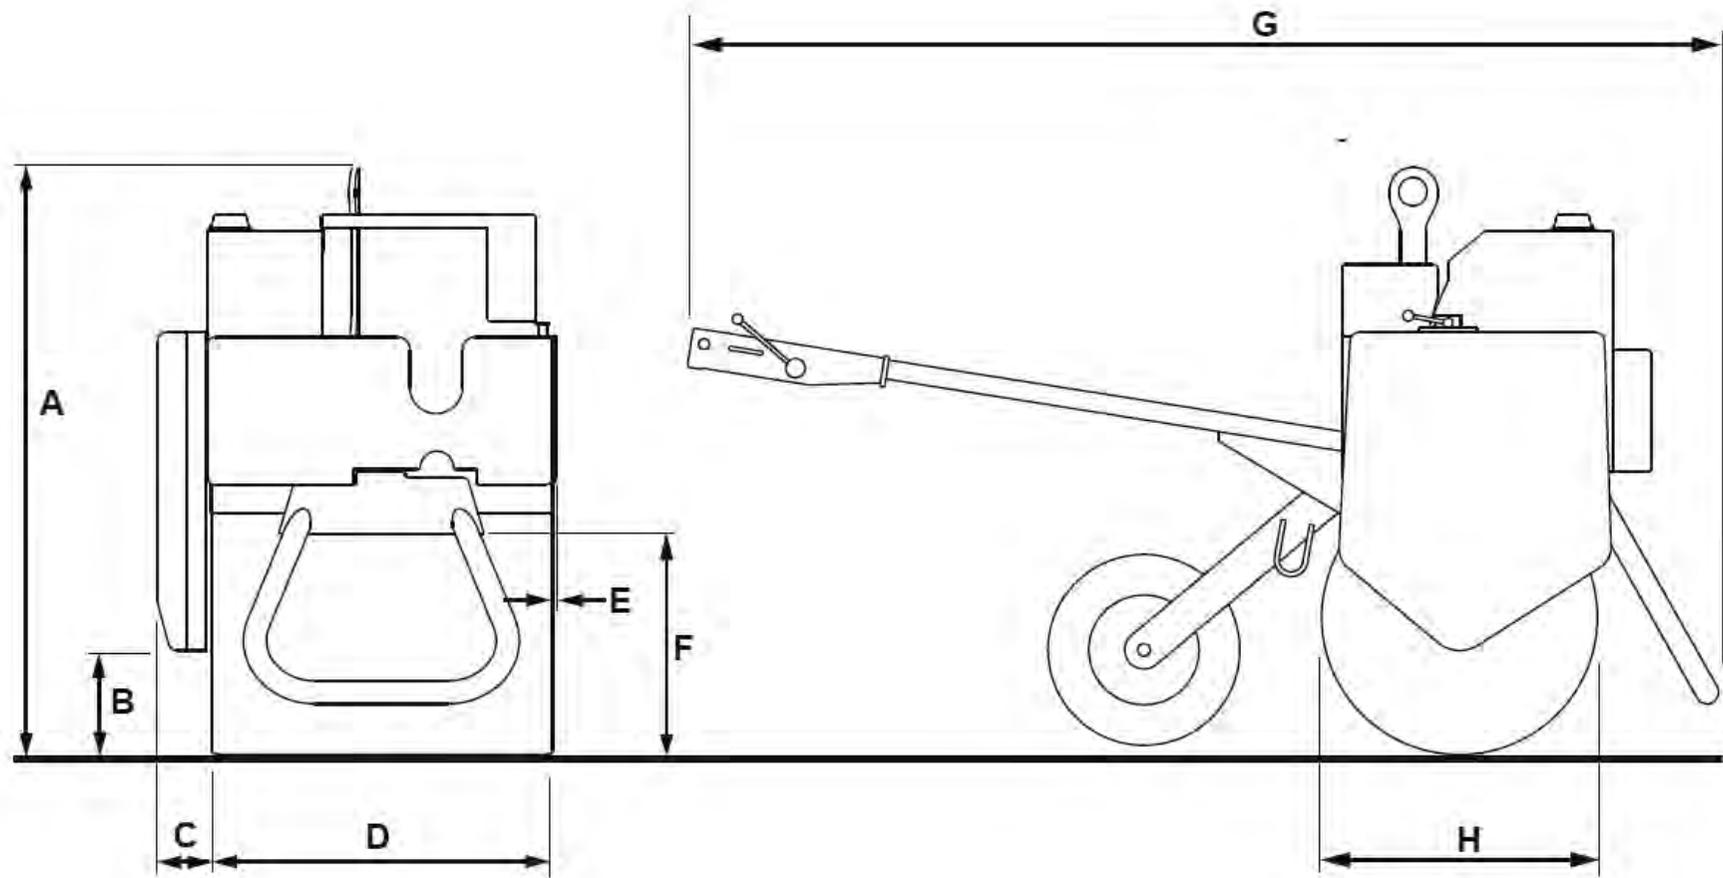

<b>PERFORMANCE</b>		<b>MBR71</b>
Total Static Basic Weight (kg)		504
Operating Weight (kg) CECE		513
Static Linear Load (kg/cm)		7.2
Frequency - Hz (VPM)		65 (3900)
Amplitude (mm)		0.66
Centrifugal Force (kN)		9.0
Gradeability - Without Vibration		33%
Gradeability - With Vibration		25%
<b>ENGINE &amp; DRIVE</b>		<b>MBR71</b>
Engine Make		Hatz
Engine Model		1D42S
Cylinders		1
Displacement (cc)		445.7
Cooling		Air
Power - kW (HP) (DIN ISO 1585)		6.6 (8.85)
Operating Speed (rpm)		3000
Fuel Type		Diesel
Drive		Hydrostatic via Duplex Chain
Maximum Travel Speed (kph) - Forwards		3.2
Maximum Travel Speed (kph) - Reverse		1.0
Braking System - Service		Dynamic Hydrostatic
Braking System - Parking		Spring Apply / Hydraulic Release (Over Centre)
Start Type		Electric
<b>CAPACITIES</b>		<b>MBR71</b>
Hydraulic Tank Capacity (litres)		7.5
Fuel Tank Capacity (litres)		5
Water Tank Capacity (litres)		20
<b>EMISSIONS</b>		<b>MBR71</b>
Noise [dB] - LwA (2000/14/EC / ISO 4871)		92.0dB
Engine Emissions		EPA IV / Euro Stage IIIA
Hand Arm Vibration (HAV) - [EN500-4]		3.6m/s <sup>2</sup>
<b>EXCITER</b>		<b>MBR71</b>
Type		Single Shaft
Drive		Vee Belt / Dry Clutch
<b>WATER SPRAY SYSTEM</b>		<b>MBR71</b>
System Type		Gravity Fed with Non-Corrosive Spray Bar
<b>DRUM SCRAPER BARS</b>		<b>MBR71</b>
System Type		Heavy Duty Adjustable - Front and Rear

## STANDARD EQUIPMENT


Gravity Fed Water System
Drum Scraper Bars Front and Rear
Low Maintenance Battery (12V)
Emergency Release Free Wheel Valve
Heavy Duty Central Lifting Point
Battery Isolator
Emergency Stop
Front Prop Stand
Rear Jockey Wheel
Electric Starting
Hour Meter
30 litres / minute hydraulic take-off valve

## OPTIONAL EQUIPMENT

Stanley BR50 Vibro-Damped Hydraulic Breaker with tools, valve and hosing (light use only)
Stanley BR67 Vibro-Damped Hydraulic Breaker with tools, valve and hosing (must be carried on towing vehicle)
'Towit' Tow-Behind Trailer with Storage Box, Prop-Stand, Number Plate Lighting and Road Lighting
'Towit' Tow-Behind Trailer, longer break-away tether cable with clip on hook.

# → TECHNICAL DATA COMPACT TANDEM ROLLERS

DIMENSIONS IN MM		TV800	TV900	TV1000	TV1200	TV1300	TV1400
<b>A</b>	Drum Width (mm)	800	900	1000	1200	1300	1400
<b>B</b>	Overall Width (mm)	870	970	1070	1270	1370	1470
<b>C</b>	Overall Length (mm)	1860	1860	2375	2375	2375	2375
<b>D</b>	Height to Top of Steering Wheel (mm - Transport Height)	1530	1530	1940	1940	1940	1945
<b>E</b>	Curb Clearance - Right (mm)	420	420	555	555	555	555
<b>F</b>	Curb Clearance - Left (mm)	390	390	490	490	490	490
<b>G</b>	Ground Clearance (mm)	200	200	230	230	230	230
<b>H</b>	Drum Diameter (mm)	550	550	700	700	700	706
<b>J</b>	Wheelbase (mm)	1260	1260	1675	1675	1675	1675
<b>K</b>	Height to Top of ROPS frame (mm)	2400	2400	2650	2650	2650	2655
Overhang - Left / Right (mm)		35/35	35/35	35/35	35/35	35/35	35/35

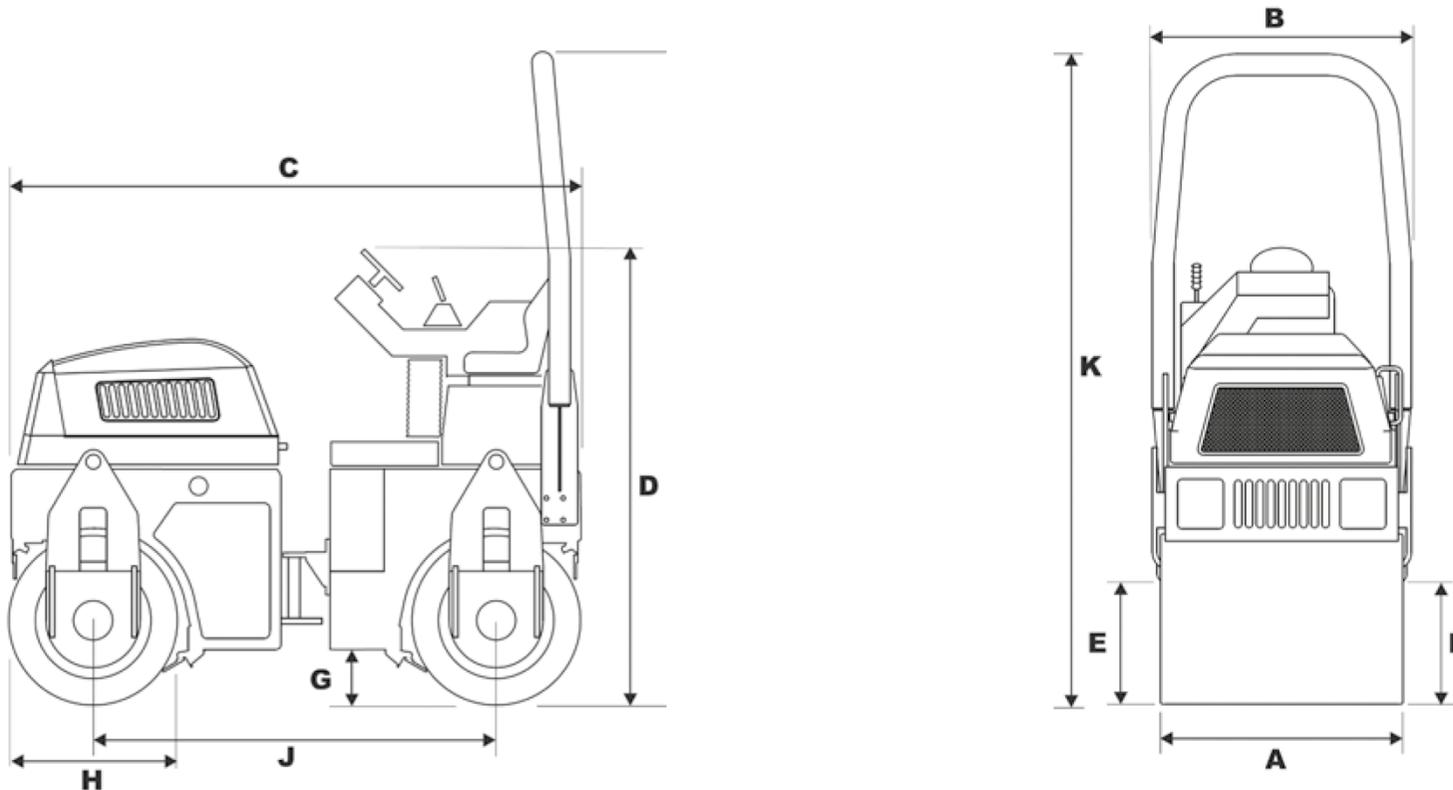

PERFORMANCE	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Total Static Basic Weight (kg)	1446	1455	2385	2740	3240	4175
Operating Weight (kg) CECE	1559	1568	2570	2925	3435	4390
Static Linear Load (kg/cm)	9.7	8.7	12.85	12.18	13.21	15.68
Frequency - Hz (VPM)	46/52 (2760/3120)		48/56 (2880/3360)			
Amplitude (mm)	0.5	0.5	0.5	0.6	0.5	0.5
Centrifugal Force (kN)	10/12.5	10/12.5	17/23	22/30	27/37	45/61
Gradeability - Without Vibration	30%	30%	30%	30%	30%	30%
Gradeability - With Vibration	40%	40%	40%	40%	40%	40%
Drum Shell Thickness (mm)	10	10	10	10	10	10
Drum Finish	Machine chamfered edges					
Vibrating Drums	Front and Rear or Rear Only (selectable)					
ENGINE & DRIVE	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Engine Make	Kubota	Kubota	Kubota	Kubota	Kubota	Kubota
Engine Model	D905	D905	D1703-M	D1703-M	V2203-M	V2203-M
Cylinders	3	3	3	3	4	4
Displacement (cc)	898	898	1647	1647	2197	2197
Cooling	Water	Water	Water	Water	Water	Water
Power - kW (HP)	15.5 (20.8)	15.5 (20.8)	24.5 (32.83)	24.5 (32.83)	32.4 (43.4)	32.4 (43.4)
Operating Speed (rpm)	2500/3000	2500/3000	2300/2800	2300/2800	2300/2800	2300/2800
Fuel Type	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Drive (both drums)	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Travel Speed (kph)	8.0	8.0	8.0	10	10	10
Braking System - Service	Dynamic Hydrostatic (via propulsion system)					
Braking System - Parking	Spring Apply / Hydraulic Release on both drums					
WATERING SYSTEM	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Tank Capacity (litres)	86	86	180	180	200	200
Spray Modes	Gravity / Pressure			Pressure		
ELECTRICAL SYSTEM	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Battery (volts)	12V DC	12V DC	12V DC	12V DC	12V DC	12V DC
Alternator (amp)	30	30	55	55	55	55
LUBRICATION SYSTEM	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Type	Grease - open loop, parallel circuit with centralised greasing points					
EMISSIONS	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Engine	Euro Stage IIIA					
Noise (dBA)	106	106	106	106	106	106
CAPACITIES	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Hydraulic Tank Capacity (litres)	28	28	44	44	44	44
Fuel Tank Capacity (litres)	18	18	44	44	44	44
Water Tank Capacity (litres)	86	86	180	180	200	200
STEERING	TV800	TV900	TV1000	TV1200	TV1300	TV1400
Steering Type	Centrepoint Articulation - Double acting (via single hydraulic ram)					
Inside Turn Radius (mm)	1950	1900	2625	2525	2475	2425
Outside Turn Radius (mm)	2820	2870	3695	3795	3845	3895
Frame Articulation (degrees)	30	30	30	30	30	30
Frame Oscillation (degrees)	8	8	15	15	15	15

## STANDARD EQUIPMENT

Fixed ROPS frame
Integral lifting points
Amber Beacon
Fuel and hydraulic oil tanks level gauges (TV1000 to TV1400)
Road Lights - UK Road Traffic Act compliant (TV1300 and TV1400 only)
Vandal Protection Package - Lockable instrument cover to deter vandals / thieves
Site Lights (Dependent on region)
Centralised greasing points for easy servicing
Gravity Fed Water System (TV800 to TV1200H only)
Vibration insulated operator's station
Pressurised Water System (TV1300 and TV1400 only)
Deluxe operator's seat with lap belt and traction cut-out switch - automatic stop if operator stands up during operation
Drum Scraper Bars Front and Rear (both drums)
Articulation Lock Bar
Sliding operator seat (TV1200H to TV1400)
Removable plastic water and oil tanks for easy servicing
Fault finding lights on instrument panel
Low maintenance battery
Steering Knob
Single piece tilting engine hood
6 in 1 control lever
Emergency Release Free Wheel Valve (for towing)
Hour meter

## OPTIONAL EQUIPMENT

Folding ROPS frame
Audible Reversing Alarm
Road Lights - UK Road Traffic Act compliant (TV800 to TV1200H)
Sun Canopy (TV1000 to TV1400 only)
Pressurised Water Spray (TV800 to TV1200H)
Hydraulic Breaker attachment, tool, valve and hosing - 30 l/min (TV800 to TV900)



Mecalac



#mecalac



Mecalac